

# DocuPrint CM415 AP / M465 AP

Think bigger. Go smaller



# Big performance doesn't have to come with big dimensions.

Fuji Xerox makes you rethink size with the DocuPrint CM415 AP / M465 AP. Compact yet fast and flexible, these two smart machines are set to bring productivity in your office to a new high!

# **Compact Performers**

# Highly functional multifunction device

The DocuPrint CM415 AP / M465 AP are a compact print solution, delivering fast print speeds and exceptional colour and monochrome print quality, supporting copying, faxing and scanning and email.

## Mobile and cloud connectivity

The DocuPrint CM415 AP / M465 AP offer support for mobile devices, allowing easy access to the device whether you are in or out of the office.

#### DocuPrint CM415 AP

# Copy Print Colour: 35 ppm

Scan Monochrome: 40 ppm Colour: 20 ppm

#### DocuPrint M465 AP



Monochrome: 45 ppm



Monochrome: 40 ppm Colour: 20 ppm



# Productivity and Efficiency

## **Advanced document security**

The built-in Authentication feature available on the DocuPrint CM415AP / M465 AP adds secure document printing for up to 1,000 users. Documents can be sent to the device, where they are held in its

hard drive until you release the job by entering a password or pin code. For even greater efficiency, you can 'tap-and-go' to release the print job with a security swipe card by adding a built-in IC Card Reader^ to the device.




Built-in IC Card Reader

IC Card authentication can also provide access control to specific functions on the device, enhancing both security management and user convenience.

This is critical in environments where multiple users have access to the same device, and where confidential documents could fall into the wrong hands.

^ Requires IC Card Reader Kit option

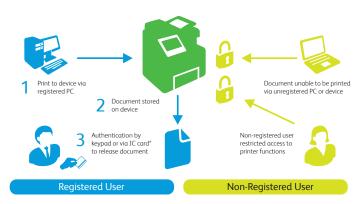

# Take control of your print environment

The DocuPrint CM415 AP / M465 AP feature advanced reporting that can track and report every page that is printed on the device – by user, workgroup or department. By adding the optional Image Log Kit, you'll be able to automatically store every image that's ever been printed, scanned, copied or faxed to a third party server or folder. It's the ultimate safeguard if you require an audit trail for legal or security reasons.

Print limits can be assigned per user or group, including copies and scans. This not only gives you complete control over your print costs, but also gives you total visibility of your print environment.



# Intuitive 7-inch touch panel with Flick/Drag operation

The DocuPrint CM415 AP / M465 AP are equipped with an easy-to-use, 7-inch touch screen that supports flick/drag operations, allowing for intuitive, easy operation. The menu is customisable, allowing the user to tailor menu items to common work functions, increasing productivity.

## Powerful Document Handling via DocuWorks\*

DocuWorks is a document handling software that integrates with the DocuPrint CM415 AP / M465 AP. It allows you to manage and share information by seamlessly handling, searching and editing electronic documents created with various applications (Microsoft Office, PDF, etc) and paper documents imported from scanners.

Furthermore, when integrated with Working Folder\* – Fuji Xerox's cloud service, you can securely access your information on the go through an internet enabled device.

#### **Create Searchable PDF Documents**

With the optional Searchable PDF Kit you can convert paper based documents into searchable PDF documents.

Perfect for archiving, your documents can be stored electronically, saving on bulky storage space and time consuming document handling. And as the documents are now 'searchable', retrieval of information is quick and easy.

# Automate complex processes with a touch of a button

The manual processing of paperwork in business is costly in terms of time and resources. The DocuPrint CM415 AP / M465 AP can automate these manual processes by customising the control panel to your specific requirement.

If you regularly scan and email documents to certain people or workgroups, you can set up a specific icon on the control panel to do this automatically. For example, if you want to scan a document and save it to a network folder, and at the same time email it to a certain address, plus make 3 copies of it, then this can be automated through a press of a single button. If you want to turn a complex document into a searchable pdf, store it in a network directory for retrieval, and compress the large file before emailing, then this too can be achieved via a one-touch operation.

By eliminating manual processes many organisations, large and small, can achieve increased staff productivity, minimised risk of errors, improved office communication, and reduced overall cost of document-handling.

# **Eco-friendly**

# **EA-Eco toner reduces power consumption**

Our EA-Eco Toner with low-melt technology achieves minimum fusing temperature at 20°C less than conventional toner for significant energy savings.

## **Excellent TEC Value**

The DocuPrint CM415 AP / M465 AP conform to the International Energy Star Program standards for reducing power consumption.





CM415 AP M465 AP

# **Remote Power off**

Devices located at a distance may be switched off remotely via PC. In large facilities such as a campus or factory building, this feature can reduce the time and labour required to manage remote devices.

#### Other convenient features

- 1 Duplex Auto Document
  Feeder Copying and
  scanning is fast and efficient
  thanks to the Duplex
  Automatic Document Feeder
- 7-inch Colour Touch Screen
  Interface
- 3 150 sheet Mutipurpose tray
- 4 550 sheet input tray
- 5 One tray module\* 550 sheet tray

(Extra two tray module available only on the DocuPrint M465 AP)

6 Cabinet\*

\* Optional



<sup>\*</sup> Optional

# **Specifications** DocuPrint CM415 AP / M465 AP

#### Basic Specifications / Copy Function

		1 2	
		DocuPrint M465 AP	DocuPrint CM415 AP
Item		Description	
Type		Desktop	
Memory Capacity		4 GB (Max.4 GB)	
Hard Disk Co	apacity "1	160 GB or larger (Used space: 128 GB)	
Colour Capa	ibility	Monochrome	Full colour
Copy Resolu	ition	600 × 400 dpi	
Printing Resolution		1200 × 2400 dpi (Photo <sup>2</sup> ), 600 × 600 dpi (Text/Text-Photo/Photo/Map)	600 x 600, 1200 x 1200
Warm-up Time		35 seconds or less (At room temperature 23°C). 18 seconds or less if the main power is on (At room temperature 23°C).	35 seconds or less (At room temperature 23°C). 20 seconds or less if the main power is on (At room temperature 23°C).
Original Size		Maximum of Legal for both Sheet and Book	
	Мах.	A4, Legal' <sup>3</sup> [Legal when using Bypass Tray]	
Danor Cizo	Min.	A5 [Postcard(100 $\times$ 148), 3 $\times$ 5" (76 $\times$ 127 mm), when using Bypass Tray]	
Paper Size	Image Loss Width	Lead Edge 4.0 mm, trail Edge 4.0 mm, Right & Left Edges 4.0mm	
Paper	Paper Tray	60 to 216 gsm	
Weight 4	Bypass Tray	60 to 216 gsm	
First Copy Output Time		Monochrome: 5.0 seconds	Monochrome: 8.6 seconds (A4 / Monochrome priority mode) Colour: 10.0 seconds (A4 / Colour priority mode)
	Same Magnification	1:1 +/- 2%	
Reduce /	Reduce/ Enlarge Presets	50%, 70%, 81%, 86%, 115%, 122%, 141%, 200%	
Enlarge	Custom Reduction/ Enlargement Ratios	25 to 400% (in 1% increments)	
Continuous C	opy Speed*5	Monochrome: 45 ppm	Monochrome: 35 ppm, Colour: 35 ppm
	Standard	550 sheets × 1 tray + Bypass Tray 150 sheets	550 sheets × 1 tray + Bypass Tray 150 sheets
Paper Tray	Optional	Sheet Feeder: 550 sheets	Sheet Feeder: 550 sheets
Capacity 16	Max.	2350 sheets (Standard + Sheet Feeder × 3 tray)	1250 sheets (Standard + Sheet Feeder × 1 tray)
Continuous Copy *7		999 sheets	
Output Tray Capacity *6		250 sheets	
Power Supply		AC220-240 V ± 10%, 6 A, 50 / 60 Hz	AC220-240 V ± 10%, 5 A, 50 / 60 Hz
Power Consumption (AC230V +/- 10%)		1.09 kW or less Sleep Mode: 1.25 W or less Low Power Mode: 18.43 W or less' <sup>8</sup> Ready Mode: 81.18 W or less	1.13 kW or less Sleep Mode: 1.18 W or less Low Power Mode: 22.31 W or less <sup>'8</sup> Ready Mode: 82.60 W or less
Dimensions		W 560 × D 541 × H 577 mm	W 538 × D 553 × H 625 mm
Weight*5		26 kg	37 kg
*1: Not all of the hard disk car		pacity is actually available for users. *2: When	Image Enhancement processing is performed

<sup>&</sup>quot;I. Not all of the hard disk capacity is actually available for users. "2. When Image Enhancement processing is performed." 3: The tray should be extended when legal size paper is placed on it. "4: Use Fuji Xerox recommended paper. Documents may not be printed correctly depending on usage conditions. "5: The speed may be reduced due to the image quality adjustment." 6: 80 garn paper. "7: Copy process may stop temporally for stabilisation of image quality. "8: Low Power Mode is not set at the time of shipment from the factory. "9: Including Toner Cartridge.

#### Print Function

Item		Description	
Page Description Language		Standard: PCL5 / PCL6 Optional: Adobe® PostScript® 3	
Operating System <sup>-2</sup>	PCL 6 (Standard)	Windows Servei* 2003 (32bit), Windows Vista* (32bit), Windows Servei* 2008 (32bit), Windows* 7 (32bit), Windows* 8 (46bit), Windows Servei* 2008 (46bit), Windows Servei* 2008 (46bit), Windows Servei* 2008 (46bit), Windows* 8 (	Windows Servet <sup>®</sup> 2003 (32bit), Windows Vstaf <sup>®</sup> (32bit), Windows Servet <sup>®</sup> 2008 (32bit), Windows <sup>®</sup> (32bit), Windows <sup>®</sup> (32bit), Windows <sup>®</sup> (32bit), Windows <sup>®</sup> (32bit), Windows Servet <sup>®</sup> 2003 (64bit), Windows Servet <sup>®</sup> 2008 (64bit), Windows Servet <sup>®</sup> 2008 (64bit), Windows Servet <sup>®</sup> 2008 (64bit), Windows Servet <sup>®</sup> 2012 (64bit)
		Mac OS X 10.5/10.6/10.7, OS X 10.8/10.9	
	Adobe <sup>®</sup> PostScript <sup>®</sup> 3™ Driver (Optional)	Windows Server <sup>®</sup> 2003 (32bit), Windows Vista <sup>®</sup> (32bit), Windows Server <sup>®</sup> 2008 (32bit), Windows <sup>®</sup> (32bit), Windows <sup>®</sup> (32bit), Windows <sup>®</sup> (32bit), Windows <sup>®</sup> (46bit), Windows Server <sup>®</sup> 2003 (64bit), Windows Server <sup>®</sup> 2008 (64bit), Windows Server <sup>®</sup> 2008 (64bit), Windows Server <sup>®</sup> 2008 (64bit), Windows <sup>®</sup> (46bit), Windows <sup>®</sup> (46bit)	Windows Servei* 2003 (32bit), Windows Vista* (32bit), Windows Servei* 2008 (32bit), Windows* 7 (32bit), Windows* 8 (32bit), Windows* 8 (32bit), Windows* 8 (32bit), Windows Servei* 2003 (64bit), Windows Servei* 2008 (64bit), Windows Servei* 2008 (64bit), Windows Servei* 2008 (64bit), Windows Servei* 2012 (64bit), Windows* 8 (
		Mac OS X 10.5 / 10.6 / 10.7 , OS X 10.8 / 10.9	
Emulation ESC / P-K (LQ1900K II), TIFF, PEG, PDF, HP-GL (HP7586B), HP-GL2 / F 750C Plus), DocuWorks, PCL5 / 6 (HP Color Laser Jet 5500), KSSM, KS			
Interface	Standard	Ethernet 100BASE-TX / 10BASE-T , USB2.0	
	Optional	Ethernet 1000BASE-T	

<sup>1:</sup> The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document. 2: For the latest information on the supported operating systems, please refer to our official website. Note: WFS stands for WALE Systems, to Reserve Systems. Note: WFS stands for WALE Systems.

- Notes

  Ji If the storage media (such as hard disk drives) of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall Fuji Xerox be liable for any damages whatsoever arising from loss of data.
- 2) Functional spare parts will be available for at least 7 years after the product is no longer manufactured.

  3) The product specifications, appearance and other details in this catalog are subject to change without notice for improvements.

 $Other \ company \ names \ or \ product \ names \ are \ registered \ trademarks \ or \ trademarks \ of \ each \ company.$ 

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law:

Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. Unused postage stamps, post cards, etc.

Certificate stamps stipulated by law. Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

#### Scan Function

Item		Description	
Туре		Colour Scanner	
Scan Resolution		600 × 600 dpi, 400 × 400 dpi, 300 × 300 dpi, 200 × 200 dpi	
Scanning Speed *1	Duplex Automatic	Monochrome: 40 ppm; Colour: 20 ppm [Fuji Xerox standard paper (A4), 200dpi, to Folder]	

<sup>\*1:</sup> The scanning speed varies depending on the documents.

#### Fax Function

Item	Description
Original Size	Max : A4, Legal
Recording Paper Size	Max: A4, Legal, Min: A5
Transmission Time	2 seconds and more but fewer than 3 seconds *1
Transmission Mode	ITU-T G3
Scanning Resolution	600 × 600 dpi, 400 × 400 dpi, 200 × 200 dpi, 200 × 100 dpi
Transmission Speed	G3:33.6/31.2/28.8/26.4/24.0/21.6/19.2/16.8/14.4/12.0/9.6/7.2/4.8/2.4kbps
Applicable Lines	Telephone subscriber line, PBX, Fax communication (PSTN), Max. 1 port

<sup>\*1:</sup> When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 \* 3.85 lines/mm) and in high-speed mode (28 skbps or faster, IBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition.

#### **Duplex Automatic Document Feeder**

Item	Description	
Original Size /	riginal Size / Max.: A4, Legal; Min: A5 <sup>-1</sup>	
Paper Weight	50 to 125 gsm (In Duplex: 60 to 125 gsm)	
Capacity*2	60 Sheets	
Feeding Speed (A4 Simplex)	Monochrome: 40ppm	Monochrome: 35ppm, Colour: 20ppm

<sup>\*1: 139.7× 139.7</sup> mm for non-standard paper size. \*2: 80gsm paper.

#### Accessories

	DocuPrint M465 AP	DocuPrint CM415 AP
Item	Code	Code
550 Sheet Feeder	EC102823	EC102803
Cabinet	EC102786	EC102786
Stand Skateboard	EC102787	EC102787
Embedded IC Card Reader*1	EC102893	EC102893
Omnikey External Card Reader <sup>2</sup>	800L06481	800L06481
Serverless On-Demand Print Kit* <sup>3</sup>	800L06045	800L06045
Annotation Copy Kit	EC102840	EC102807
Network Accounting Kit	EC102904	EC102894
External Access Kit	EC102905	EC102895
USB Memory Kit	EC102843	EC102810
Gigabit Ethernet	EC102906	EC102896
Adobe PostScript 3 Kit	EC102907	EC102897
TC/SC Additional Font ROM Kit	EC102908	EC102898
Server Fax Kit	EC102909	EC102899
High Compression Image Kit	EC102848	EC102815
Searchable PDF/DW	EC102849	EC102816
Copy Management Expansion Kit	EC102910	EC102900
Image Log Kit	EC102911	EC102901
Image Log Kit (Adobe PostScript)	EC102912	EC102902

<sup>11:</sup> Supports FeliCa (SSFC-L1), MIFARE, TypeB (eLWISE / ELWISE) cards, does not support HID (refer to Omnikey Reader)
22: Supports HID. Requires US8 kt. 73: Serverless On-Demand Print Kit enables pull-printing capability for a small network up to 5
devices (CM415AP and/or M465AP), one kit required per device.

#### Consumables

Item	Code	Code
Toner Cartridge (K)*1	CT202373 (25k) CT202372 (10k)	CT202352 (11k)
Toner Cartridge (Y)*1	-	CT202353 (11k)
Toner Cartridge (M)*1	-	CT202354 (11k)
Toner Cartridge (C)*1	-	CT202355 (11k)
Drum Cartridge*1	CT351069 (85k)	CT351066 (60k)
Fusing Unit 220V*1	_	EC102822 (30k)
Waste Toner Cartridge*1	-	EL500268 (100k)
Maintenance Kit*1	EC102854 (200k)	EL500267 (200k)
Feed Roll Kit*1	EC102856 (100k)	-

<sup>11:</sup> Average standard pages. Declared Yield in accordance with ISO/IEC 19752. Yield will vary based on image, area coverage and

For Your Safety

Before using the product, read the Instruction Manual carefully
for proper use. Use the product with the power source and voltage
specified. Be sure to establish ground connection. Otherwise,
electronic shock may result in the case of a failure or short circuit. For Your Safety

For more information or detailed product specification, please call or visit us at

# Fuji Xerox Asia Pacific Pte Ltd

14a Rodborough Road Frenchs Forest NSW 2086 Australia 1300 793 769 New Zealand 0800 993 769

www.fujixeroxprinters.com.au www.fujixeroxprinters.co.nz

