
C7000 & C9000 SERIES V2 COLOUR AND MONO PRINTERS



- --- C7300 V2
- --- C7500 V2
- --- C9300 V2
- --- C9500 V2





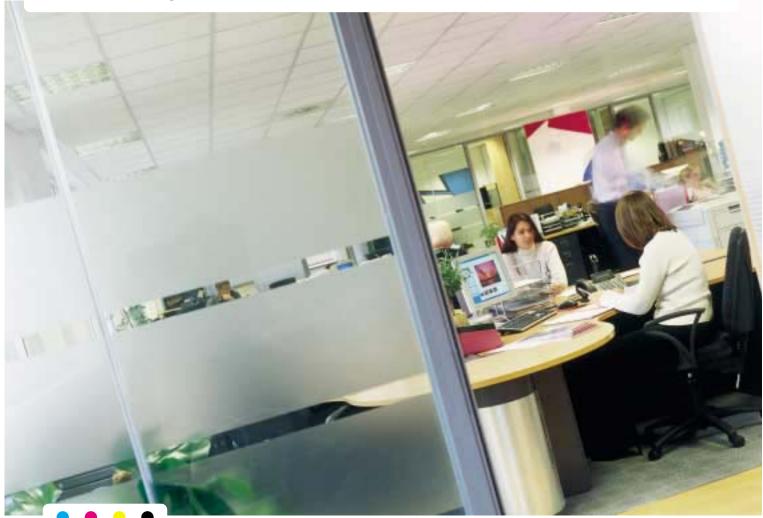





LOOK WHAT YOU CAN DO - WITH EASE

Because the new C7000 and C9000 Series V2 are from Oki, you don't just get a great colour and mono printer packed with user friendly features, you also get plenty of help to make the most of them. We call this **Chromability™**— in-house colour printing made easy, only from Oki.

Two examples of Chromability™ include our simple to use Template Manager software and 'Ask Oki' support service, both of which demonstrate our commitment to helping you get the most from your Oki printer.

Template Manager allows you to quickly and confidently create a range of impressive documents – from 1.2m long banners to business cards. You can also easily print PDF files, transparencies, spreadsheets and colourful PowerPoint presentations. Most importantly, your results will look as professional as today's business world demands.

And if you ever need advice on getting the most out of your printer then just 'Ask Oki'. You'll find the 'Ask Oki' button on your printer's driver screen; it will take you straight to a dedicated web site specific to your C7000 Series V2 or C9000 Series V2 to help you unlock your printer's true potential.


TEMPLATE MANAGER



'ASK OKI'




C7000 SERIES V2

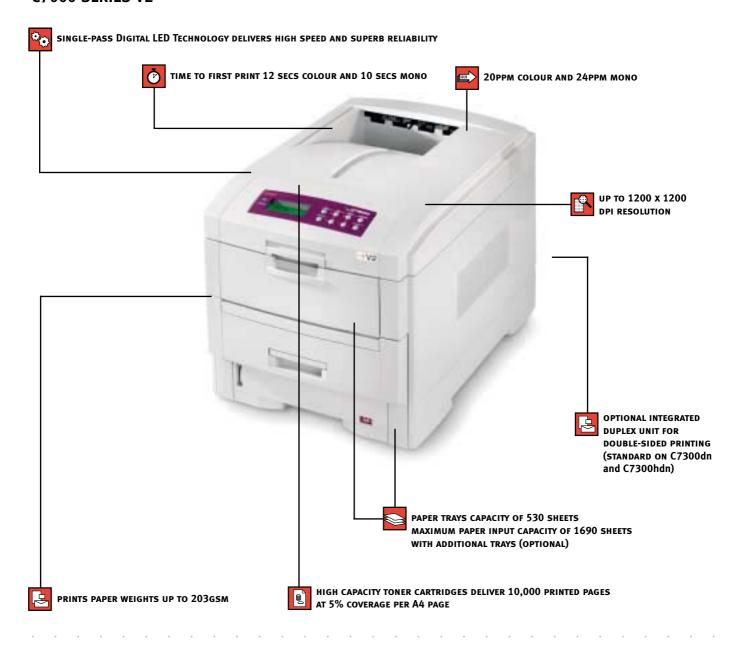

THE NEW C7000 SERIES V2 FEATURES AT A GLANCE C7300 V2		C7300n V2	C7300dn V2	C7500hdn V2	
20ppm colour	•	•	•	•	
24ppm mono	•	•	•	•	
Printer language	PCL5c/PCL6/ Adobe PostScript®3	PCL5c/PCL6/ Adobe PostScript®3	PCL5c/PCL6/ Adobe PostScript®3	PCL5c/PCL6/ Adobe PostScript®3	
Auto Colour Balance	•	•	•	•	
Integrated Networking + USB 2.0	Optional network	•	•	•	
Resolution	1200 x 600	1200 x 600	1200 x 600	1200 x 1200	
10GB Hard Disk Drive	Optional	Optional	Optional	•	
Memory	64MB	64MB	128MB	256MB	
Processor speed	450MHz	450MHz	450MHz	450MHz	
Automatic double-sided printing	Optional	Optional	•	•	
Second paper tray	Optional	Optional	Optional	Optional	

C9000 SERIES V2

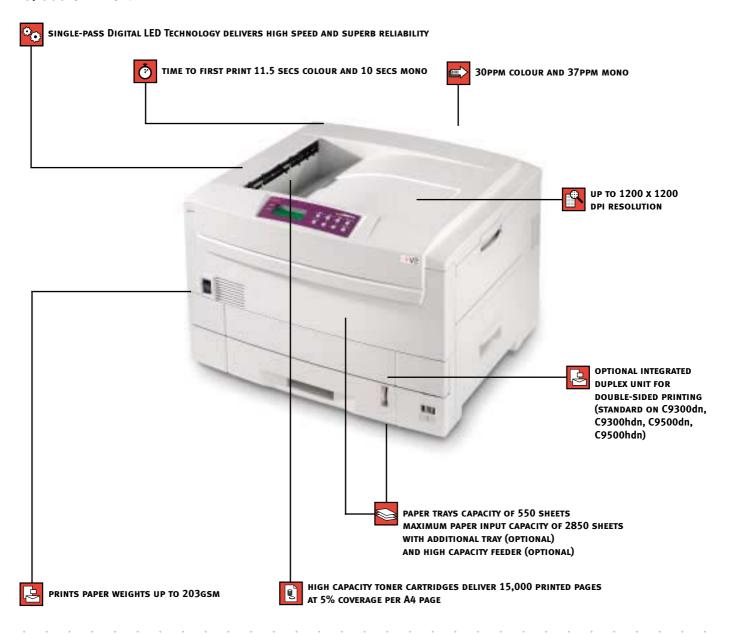

THE NEW C9000 SERIES V2 FEATURES AT A GLANCI	E C9300n V2	C9300dn V2	C9300hdn V2	C9500dn V2	C9500hdn V2
30ppm colour/37 mono	•	•	•	•	•
A3 Printing	•	•	•	•	•
Printer language	PCL5c/PCL6/ Adobe PostScript®3				
Auto Colour Balance	•	•	•	•	•
Integrated Networking + USB 2.0	•	•	•	•	•
Resolution	1200 x 600	1200 x 600	1200 x 600	1200 x 1200	1200 x 1200
10GB Hard Disk Drive	Optional	Optional	•	Optional	•
Memory	128MB	192MB	192MB	320MB	320MB
Processor speed	450MHz	450MHz	450MHz	600MHz	600MHz
Automatic double-sided printing	Optional	•	•	•	•
Second paper tray + High Capacity Feeder	Optional	Optional	Optional	Optional	Optional

C7000 & C9000 SERIES V2 COLOUR AND MONO PRINTERS

		C7300 V2	C7500 V2	C9300 V2	C9500 V2		
Part nos		C7300: 01132401 C7300n: 01132501 C7300dn: 01132601	C7500hdn: 01132801	C9300n: 01132901 C9300dn: 01133001 C9300hdn: 01133101	C9500dn: 01133301 C9500hdn: 01133401		
Speed &	A4 print speed	20ppm colour, 24ppm mono	20ppm colour, 24ppm mono	30ppm colour, 37ppm mono	30ppm colour, 37ppm mono		
throughput	A4 OHP colour	8	ppm	10 _F	pm		
	A3 print speed	1	N/A	16ppm colour, 20ppm mono			
	Time to first print	12 seconds colou	ır, 10 seconds mono	11.5 seconds colour, 10 seconds mono			
	Warm up time	90 s	econds	160 seconds			
	Processor speed	450MHz		450MHz 600MHz			
Print quality	Resolution	1200 x 600 dpi	1200 x 1200 dpi	1200 x 600 dpi	1200 x 1200 dpi		
, ,	Enhancements	Automatic colour b		installation of new toner or drum; Auto Registration occurs on power up, ges (not in middle of printed job) Toner Save mode.			
	Colour matching	Oki Colour Matching; ICC-compliant colour profiles for ColorSync and ICM; EuroScale and SWOP commercial press simulations; Pantone Certification					
Typefaces	Printer fonts		80 scaleable PCL fonts, 1 bitmap font, 10 TrueType fo	onts, 136 Adobe Type 1 fonts, OCR A/B, USPS Barcod	e		
Printing process		Single Pass Digital LED electrophotographic page printer with four image drum cartridges					
Compatability	Printer languages	Adobe Postscript® 3 with direct pdf printing and PCL5c and PCL6; Automatic emulation switching; Epson FX and IBM ProPrinter Dot Matrix emulations					
	Connectivity	IEE 1284 Bi-directional Parallel and USB High Speed 2.0; 10/100-TX Ethernet card (optional on C7300)					
	OS Compatibility	Windows 95, Windows 98, Windows 98 SE, Windows ME, Windows NT4 Workstation, Windows NT4 Server, Windows 2000 Workstation, Windows 2000 Professional, Windows 2000 Server, Windows 2000 Advanced Server, Windows XP Professional, Windows XP Home, Windows NT Terminal Server Edition and Windows 2000 Terminal Server with Citrix Metaframe 1.8 or Citrix Metaframe XP 1.0. Mac OS 8.6 (or higher), Mac OS X (10.1 or higher), Variants of Unix and Linux via PPDs					
	Network and Protocols	10/100 Base TX Ethernet Card with internal Web Server for printer and network card set-up and management.Includes POP3 and SMTP Mail. client for submission of print jobs and for alerts. ALL major network protocols supported - TCP/IP, Netware, Ethertalk and NetBEUL TCP/IP -ARP, RARP, IP, (ZMP, TCP, UDB, LPB, FTP, TELNET, HTTP(IPP), BOOTP, DHCP, SNMP, DMS, JetDirect protocols. Netware 3.x, 4.x, 5.x and 6 with full NDS and NDPS supports: PServer, RPrinter, NDPS supported via debtacted OKI NDPS Gateway. EtherTalk:- ELAP, AARP, DDP, AEP, NBP, ZIP, RTMP, ATP, PAP. NetBEUI:- SMB, NetBIOS.					
	Utilities	Utilities Print Control software allows ability to manage and control colour printing on the network; PrintSuperVision: Web-based software printer management tool; Oki Template easy-to-use software that enables simple creation of templates for printing business cards, banners and bar-coded documents; Storage Device Manager*; stores and manages lops: Institute					
Memory	RAM	64MB C7300, C7300n 128MB C7300dn	256MB	128MB C9300n 192MB C9300dn 192MB C9300hdn	320MB		
	Max RAM		1024MB (optional 64MB, 1	.28MB, 256MB, 512MB DIMMs)			
	10GB Hard Disk Drive	Option	Standard	Option C9300n Option C9300dn Standard C9300hdn	Option C9500dn Standard 9500hdn		
Paper handling	Internal tray capacity (tray 1) and paper weight	530 sheets, 60–176gsm, 200 sheets OHP		550 sheets, 64–203gsm, 200 sheets OHP			
	Optional 2nd tray	530 sheets, 60–176gsm		550 sheets, 64–203gsm			
	Optional 3rd tray	530 sheets, 60–176gsm		550 sheets, 64–203gsm			
	Optional High Capacity Feeder (HCF)	N/A		3 x 550 sheets, 64 - 203 gsm (max 4 additional trays including HCF)			
	Paper size (any tray)	A4 , A5, B5 , A6 (tray 1 only), Legal13, Legal13.5, Legal14, Letter, Executive		A3, A3Nobi, Tabloid Extra, A3wide, A4, A4-L, A5, B4, B5, B5-L, A6 (tray 1 only), Tabloid, Legal13, Legal13.5, Legal14, Letter, Letter-L, Executive			
	Multi-purpose tray		onarch, Custom Size (up to 1200mm length), egal14, Letter, Executive	A3, A3Nobi, Tabloid Extra, A3wide, A4, A4-L, A5, A6, B4, B5, B5-L, C5, DL, C4, Com-9, Com-10, Monarch, Custom Size (up to 1200mm length), Tabloid, Legal13, Legal13.5, Legal14, Letter, Letter-L, Executive			
	Multi-purpose paper weight	64 – 203gsm (max capacity 100 sheets of 80gsm paper)					
	Duplex paper weight		75 – 1				
	Paper feeding	Auto Media Dete	ect (automatic paper weight detection), Auto Paper Tra	y Select (automatically detect paper size up to A3), Tray Empty Sensor			
	Paper output		500 sheets face dow	n, 100 sheets face up			
Operating	Finishing	,	N/A	2-tray stacker/puncher/stapler (Lower tray only) output device with 100 + 1000 A4 sheet output			
	Copying options	S700 Scancopier offers high quality A4 colour and mono copying at up to 3ppm colour and 10ppm mono. Supplied with Uni Message Pro for scan to PC and scan to email.		capacity. Upper tray: 64gsm to 200 gsm face up, lower tray: 64gsm to 104gsm face down. 5900 Scancopier offers high quality A3 & A4 colour and mono copying at up to 11ppm colour and 27ppm mono. Supplied with Uni Message Pro for scan to PC and to email.			
	Temperature/		ent Feeder optional. 10°C – 32°C (17°C – 27°C recommended) / 20	Automatic Document Feeder optional.			
conditions	Humidity (operating)						
	Storage		<u> </u>	10% to 90% RH			
Power requirements	Power supply	Single phase 220-240VAC		, frequency 50Hz +/- 2Hz Typical 800W, Peak 1400W, Idle 200W (average), Power Save < 75W			
	Power consumption	Typical 500W, Peak 1350W, Idle 150W (average), Power Save < 45W Operating: 56dBA, Standby: 45dBA, Power save: 43dBA		,, , , , , , , , , , , , , , , , , , , ,			
Noise level				Operating: 55dBA, Standby: 45dBA, Power save: 43dBA			
Dimensions (HxWxD)		430 x 430 x 620 mm		460 x 666 x 626 mm			
Weight Duty Cycle	Printer duty (may)	47.5kg approx		72kg approx 150.000 pages/month			
Duty Cycle Warranty	Printer duty (max)	100,000 pages/month 150,000 pages/month Pan European 1 year on-site					
Consumables life	Toner	Pan Europear 10,000 pages at 5% coverage per colour (printers are shipped with 5 000 pages worth of each toner at 5% coverage)		15,000 pages at 5% coverage per colour (printers are shipped with 7,500 pages worth of each toner at 5% coverage)			
	Drum	23,000 page average life 30,000 page average life					
	Fuser	40.00	nn nages	90.000	nages		
	Transport belt	60,000 pages 60,000 pages @ 3P/J		80,000 pages 80,000 pages @ 3P/J			
	nansport bett	50,000 р.	w8c√ (m >1 /)	ou,uuu pages @ 3P/J			



Only use genuine Oki Original consumables to ensure the best quality and performance from your hardware. Non Oki Original products may damage your printer's performance and invalidate your warranty. Specifications subject to change without notice. All trademarks acknowledged.



OKI EUROPE, PART OF OKI ELECTRIC

OKI EUROPE LIMITED
CENTRAL HOUSE, BALFOUR ROAD,
HOUNSLOW, MIDDLESEX TW3 1HY
UNITED KINGDOM
TEL: +44 (0) 20 8219 2190

Fax: +44 (0) 20 8219 2190

